

SPR



LOW PRESSURE PAINT TRANSFER PUMPS


The range is suitable for transferring paint materials, oils, explosive liquids, feed multiple spray guns and paint circulation systems.

It is designed for high delivery upto 30 ltr/min.



FEATURES

- Pneumatically sensed Air Motor
- High Flow Rate
- Stainless Steel rust proof Hydraulic Body
- Easy Maintenance
- Ice Free Motors
- Light and Easy to handle
- Compliance to EC Norms

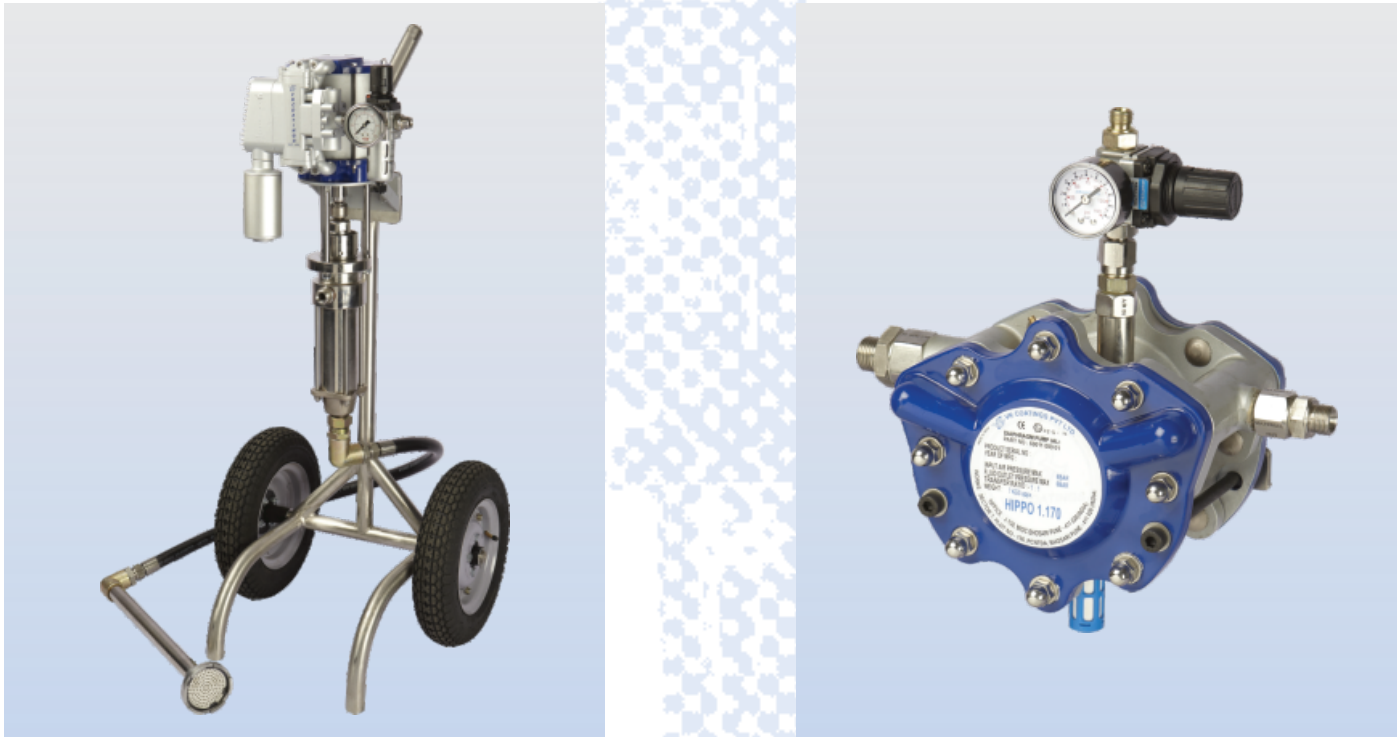

TECHNICAL SPECIFICATIONS

| | | | | |
|---|----------|--------|----------|----------|
| Type | 1:170 | 3:400 | 3:900 | 5:900 |
| Ratio | 1:1 | 3:1 | 3:1 | 5:1 |
| Output per Cycle | 170 cc | 400 cc | 900 cc | 900 cc |
| Air Motor Piston Ø | - | 80 mm | 125 mm | 160 mm |
| Stroke Length | - | 120 mm | 120 mm | 120 mm |
| Recommended Transfer Volume at 25 cycles per Minute. | 4.25 ltr | 10 ltr | 22.5 ltr | 22.5 ltr |
| Air Inlet Pressure Max. | 6 bar | 6 bar | 6 bar | 6 bar |
| Output Pressure Max. | 6 bar | 18 bar | 18 bar | 30 bar |
| Air Consumption N ltr / min at 25 cycles / min | 30 | 215 | 520 | 850 |

 **VR COATINGS PVT. LTD.**

J -138, MIDC Bhosari, Pune - 411 026. INDIA.

Tel.: +91 (020) 30781022 / 27130331 Fax : +91 (020) 30781051

E-mail.: sales@vrcoatings.com • vrcoatings@eth.net • Web : www.vrcoatings.com